

LIGHTING SOLUTIONS

FOR ALL APPLICATIONS






TUBULAR 60 SURFACE MOUNT ADJUSTABLE



Product Number: CS-00001



Material:

Die-cast Aluminium

Colour:

Black, White

Baffle Colour: Black, White, Gold

Light Source: LED

Lamp:

Lamp Base: Dedicated

Circuit Wattage: 14W

Delivered Lumens:

900lm @ 12°, 844lm @ 24°, 897lm @36° CCT

2700K as standard, 3000K, 4000K on request

CRI: 90+

Beam Angle:

12°, 24°, 36°

Input: 230V

Dimming:

Leading and trailing edge dimmable

Length:160mm

Width: 64mm

Height: 190mm

TUBULAR 60 SURFACE MOUNT



Die-cast Aluminium

Material:

Colour:

Lamp:

Lumil FDS

Dedicated

14W

Lamp Base:

900lm @ 12°.

844lm @ 24°,

897lm @36°

Circuit Wattage:

Delivered Lumens:

Black, White

Baffle Colour:

Black, White, Gold

Light Source: LED

Product Number: CS-00011



CCT

2700K as standard, 3000K, 4000K on request

CRI: 90+

Beam Angle: 12°, 24°, 36°

Input: 230V

Dimming:

Leading and trailing edge dimmable

Length:162mm

Width: 64mm

IP Rating: IP20

TUBULAR 60 PENDANT ADJUSTABLE



Product Number: SU-00001



Material:

Die-cast Aluminium

Colour: Black, White

Baffle Colour:

Black, White, Gold

Light Source: LED

Lamp:

Lamp Base: Dedicated

897lm @36°

Circuit Wattage: 14W

Delivered Lumens: 900lm @ 12°, 844lm @ 24°, CCT

2700K as standard, 3000K, 4000K on request

CRI: 90+

Beam Angle: 12°, 24°, 36°

Input: 230V

Dimming:

Leading and trailing edge dimmable

Length:162mm

Width: 64mm

IP Rating: IP20

TUBULAR 60 PENDANT



Material:

Die-cast Aluminium

Colour:

Black, White

Baffle Colour: Black, White, Gold

Light Source: LED

Lamp: LumiLEDS

Lamp Base: Dedicated

Circuit Wattage:

14.9W

Delivered Lumens: 900lm @ 12°.

844lm @ 24°, 897lm @36° CCT

2700K as standard, 3000K, 4000K on request

CRI: 90+

Beam Angle: 12°, 24°, 36°

12 , 24 , 50

Input: 230V

Dimming:Leading and trailing

edge dimmable

Length:162mm

Width: 64mm

IP Rating: IP20

TUBULAR 60 TRACK MOUNT



Product Number: TS-00001



Die-cast Aluminium

Colour: Black, White

Material:

Baffle Colour: Black, White, Gold

Light Source: LED

Lamp: LumiLEDS

Lamp Base: Dedicated

Circuit Wattage: 14.9W

14.5VV

Delivered Lumens: 900lm @ 12°, 844lm @ 24°, 897lm @36°

CCT

2700K as standard, 3000K, 4000K on request

CRI: 90+

Beam Angle: 12°, 24°, 36°

Input: 230V

Dimming: Leading and trailing edge dimmable

Length:160mm


Width: 63mm

IP Rating: IP20

TUBULAR RAIL 75 TRACK MOUNT ADJUSTABLE



Product Number: TS-00041



Material:

Aluminium

Colour: Black, White

Baffle Colour: Black, Gold

Lamp:

Osram PrevaLED

Light Source:

Circuit Wattage: Max 32W

Lamp Lumens: Max 4500lm @ 80CRI 4000K

CCT: 2700K as standard, 3000K, 4000K on request CRI:

80+ as standard, 90+ on request

Beam Angle: 25°, 35°, 45°

Input:

230V to integral LED drivers

Dimming:

Leading and trailing edge dimmable

Length:194mm

Height: 211mm

Width: 78mm

IP Rating: IP20

TUBULAR 60 MR16 TRACK MOUNT **ADJUSTABLE**



Product Number: TS-00040

Product Type: Track Mounted

Track Adaptor: 3-circuit Material: Aluminium, Plastic

Colour: Black. White

Baffle Colour: Black. Gold

Light Source: Halogen

Lamp: MR16

Lamp Base: GU5.3

Wattage: 20W, 35W

Lamp Lumens:

300lm @ 20W, 610lm @ 35W

CCT: 3000K

CRI: 100+

Beam Angle: 10°, 24°, 36°, 60°

Input: 230V

Dimmina:

Leading and trailing edge

dimmable

Length: 200mm

Width: 63mm

Height: 210mm IP Rating: IP20

Opt Accessories: Honeycombe Louvre TUBULAR 60 GU10 TRACK MOUNT **ADJUSTABLE**



Product Number: TS-00042



Product Type: Track Mounted

Track Adaptor: 3-circuit

Material:

Aluminium, Plastic

Colour: Black, White

Baffle Colour: Black, Gold

Light Source: Halogen, LED

Lamp: GU10


Input: 230V

Length: 164mm

Width: 63mm

Height: 221mm IP Rating: IP20

Opt Accessories: Honeycombe Louvre








VIEW 50 LED ENGINE

Product Number: EN-00001



Product Type: Engines / Lamps

Material:

Die-cast Aluminium

Colour: Black

Light Source: LED

Lamp Wattage: 12.6W @

350mA (Max)

Delivered Lumens:

945lm @ 350mA (90 CRI 2700K)

CCT:

2700K, 3000K, 4000K

CRI: 90+

Beam Angle:

15°, 24°, 32°

Input: 350mA max

Dimmina: Leading and trailing edge dimmable

Diameter: Ø50mm

Height: 80mm

VIEW 50 LED DOWNLIGHT **FIXED**

Product Number: RC-00102







Product Type: Ceiling Recessed

Material:

Die-cast Aluminium

Colour: Black, White

Light Source: LED

Lamp Wattage: 12.6W @

350mA (Max)

Delivered Lumens: 945lm @ 350mA (90 CRI 2700K)

CCT:

2700K, 3000K, 4000K

CRI: 90+

Beam Angle: 15°, 24°, 32°

Input: 350mA max

Dimming:

Leading and trailing edge dimmable

IP Rating: IP65 Diameter: 75mm

Height: 80mm

Opt Accessories:

Black Snoot. Honeycombe Louvre

Cut Out: 65mm








VIEW 50 LED LED DOWNLIGHT ADJUSTABLE

Product Number: RC-00103



Product Type: Ceiling Recessed

Material:

Die-cast Aluminium

Colour: Black, White

Light Source: LED

Lamp Wattage:

12.6W @ 350mA (Max)

Delivered Lumens: 945lm @ 350mA

945lm @ 350mA (90 CRI 2700K)

CCT: 2700K, 3000K, 4000K

CRI: 90+

Beam Angle:

15°, 24°, 32°

Input: 350mA max

Dimmina:

Leading and trailing edge dimmable

Diameter: Ø84mm

Height: 80mm

Opt Accessories:

Black Snoot, Honeycombe Louvre


Maximum Tilt: 30°

Maximum Rotation: 355°

Cut Out: 76mm

VIEW 50 SCOOP LED DOWNLIGHT FIXED

Product Number: RC-00104



Product Type: Ceiling Recessed

Material:

Die-cast Aluminium

Colour:

Black, White

Light Source: LED

Lamp Wattage:

12.6W @ 350mA (Max)

Delivered Lumens: 945lm @ 350mA

(90 CRI 2700K)

2700K, 3000K, 4000K

CRI: 90+

Beam Angle:

15°, 24°, 32°

Input: 350mA max

Dimming:

Leading and trailing edge dimmable

IP Rating: IP65

Diameter: 75mm

Height: 90mm

Opt Accessories:

Black Snoot, Honeycombe Louvre

Cut Out: 65mm












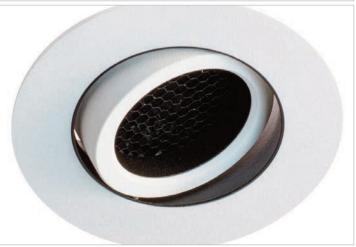

UNIT 25E, ANNIESLAND BUSINESS PARK NETHERTON ROAD, ANNIESLAND GLASGOW G13 1EU

T 0141 954 2771 **F** 0141 954 2772 WWW.SOLUSGB.COM



